



Products

2024

Issue 1

4

Torque Sealant

Visual securing of screw connections

12

Anaerobic Threadlocker

Secures screw connections against loosening

16

Pre-treatment and cleaning

For the ideal treatment of screw connections



Torque Sealant

Visual securing of screw connections

Standard Range

Our reference is characterised by extremely good adhesion.

Zero Range

The first water-based and VOC-free security coating system.

Fast Dry Range

This paint system dries extremely quickly and stays in place.

High Precision Marker

Enables highly precise and clean work on the smallest parts.

Brush Marker

Easy application with integrated brush.

Expandable with tamper protection



Secure

Contains a hidden security feature.



Topsecure

Enables clear product identification.



Standard Range

Properties

- Extremely good adhesion
- Fast drying
- Insulating
- Good media resistance

Colours

White Orange
Yellow Pink
Red Grey
Blue Black
Green Transparent



Tube 20 ml / 50 ml
Cartridge 30 ml / 50 ml
Can 1 kg



Flow
Medium viscosity / More liquid



M2 - M48

Zero Range

Properties

- Waterbased
- Food safe
- VOC free
- HAP free
- No dangerous goods

Colours

White Neon-Orange
Yellow Grey
Red Black
Blue
Green



Tube 20 ml / 50 ml
Cartridge 30 ml / 50 ml
Can 1 kg



Medium-Flow
Medium viscosity / Liquid



M2 - M48

Brush Marker

Properties

- Waterbased
- VOC free
- HAP free
- No dangerous goods

Colours

Neon-Red



Brush bottle 15 ml



Flow
Medium viscosity / More liquid



M2 - M8

High Precision Marker

Properties

- Waterbased
- VOC free
- HAP free
- No dangerous goods

Colours

Neon-Red



Dropper bottle 20 ml



Flow
Medium viscosity / More liquid



M1 - M3

Fast Dry Range

Properties

- Extremely fast drying
- Stays in place
- Insulating
- Good media resistance

Colours

White Orange
Yellow Pink
Red Grey
Blue Black
Green



Tube 20 ml / 50 ml
Cartridge 30 ml / 50 ml
Can 1 kg



Anti-Flow
Medium viscosity / Less liquid



M2 - M48



All are **UV and weather resistant** in accordance with DIN EN ISO 2810



All fulfil important **industry specifications**

Find more information on this in the technical data sheet

Accessories

Torque Sealants

Discover matching accessories for our 20 ml and 50 ml tubes

NEW

Dosing tip with cap
Ø 1,2 mm

No drying out
thanks to cap

Notches for cutting
off and increasing the
flow rate


Firm hold
by screwing on



Reusable quick-release cap
Quick-locking option of the tube between working steps.



Reusable magnetic tube holder
Allows quick and easy fixation of the tube between operations.

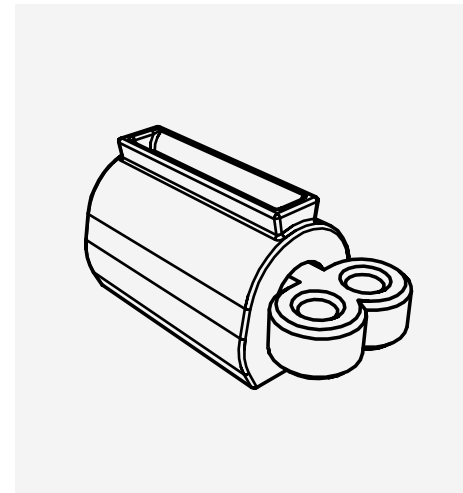

Tube squeezer with holder
Allows complete emptying of the tube and can serve as a tube stand.



Dosing tip Ø 1,0 mm
Enables precise and even application.

Available in 30 ml
and 50 ml cartridges

We also offer **dosing
needles** 1/4 inch and
dosing tips with an
internal diameter of
0.33 - 1.37 mm.



We also offer a **digital dosing
device**.



Cartridges


Automated application and process traceability

Automated application

Our cartridges have been specially developed
for use on dispensing devices or robot arms.

Process traceability

By using our cartridges in combination with a
digital dispenser, you can track when, where
and how much torque sealant has been applied
at any time.

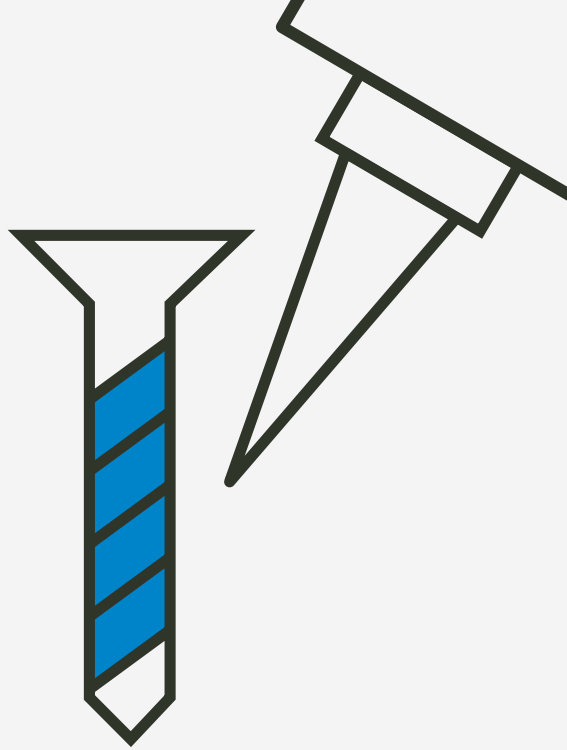

Anaerobic Threadlockers

Secures screw connections against loosening

B222 Eco Low strength


Enables the adjustment of screws, including countersunk screws and set screws.

B243 Eco Medium strength

A universally applicable medium strength threadlocker.

B270 Eco High strength

A high strength threadlocker for maximum performance when securing and sealing screws, nuts and stud bolts.

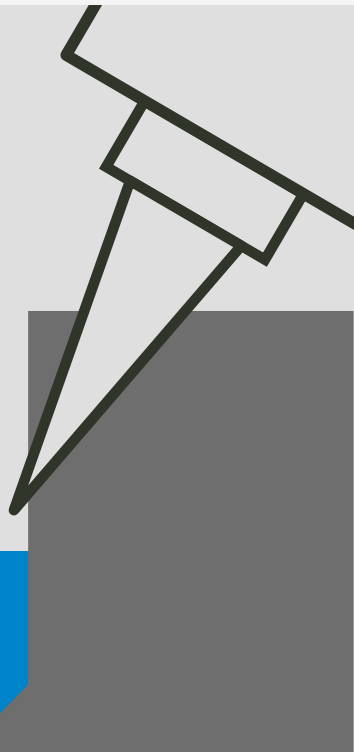



Shelf life at least
24 months



Gentle on people and
the environment



Virtually odourless

- Also secures slightly
dirty/oily screws
- Suitable for all metals
- **Prevents loosening**
due to vibration

Compared to conventional anaerobic
adhesives, our GREENMARK® products are
not a hazardous substance.

More at baederlacke.eu/en/greenmark



B222 Eco
Low strength



Can be dismantled with
hand tools
5,5 - 11,5 Nm



-55 °C bis 180 °C

Colours - fluorescent
Lila



Bottle 10 ml



Medium-Flow
Medium viscosity / Liquid



max. M36



Can be dismantled with
hand tools
15 - 25 Nm



-55 °C bis 180 °C

Colours - fluorescent
Blue



Bottle 10 ml
Accordion bottle 50 ml



Medium-Flow
Medium viscosity / Liquid



max. M36



Can be dismantled with
hand tools; Heat area locally
>35 Nm



-55 °C bis 180 °C

Colours - fluorescent
Green



Bottle 10 ml
Accordion bottle 50 ml



Medium-Flow
Medium viscosity / Liquid



max. M20

Pre-treatment and cleaning

For the ideal treatment of screw connections

Screw Cleaning Spray

Ideal for cleaning screw connections and fasteners.

Universal Remover Torque Sealant

Ideal for quickly loosening torque sealants.



Screw Cleaning Spray

Properties

- Removes grease, oil, dirt residues, soot and much more
- CFC-free



Spray can 400 ml

Universal Remover Torque Sealant

Properties

- Good handling
- Universally applicable
- Solvent-saving



Dropper bottle 50 ml

Get even more information

Data sheets
and other
documents



**Lackfabrik Bäder
GmbH & Co. KG**
Dieselstraße 34
73701 Esslingen
Germany

Get in touch with us

+49 711 381607
info@lackfabrik-baeder.de
baederlacke.eu/en

The information contained herein is for
information purposes only. For assistance
and recommendations regarding product
specifications please contact us.

© Lackfabrik Bäder GmbH & Co. KG, 2024

